

YANTAI SHENGHONG TRADING CO., LTD

Add: 23 South Beijing Road, Yantai Development Zone, Shandong Province, China

Email:shle@ytshtrading.com

WhatsApp/Wechat:+86 13954571733



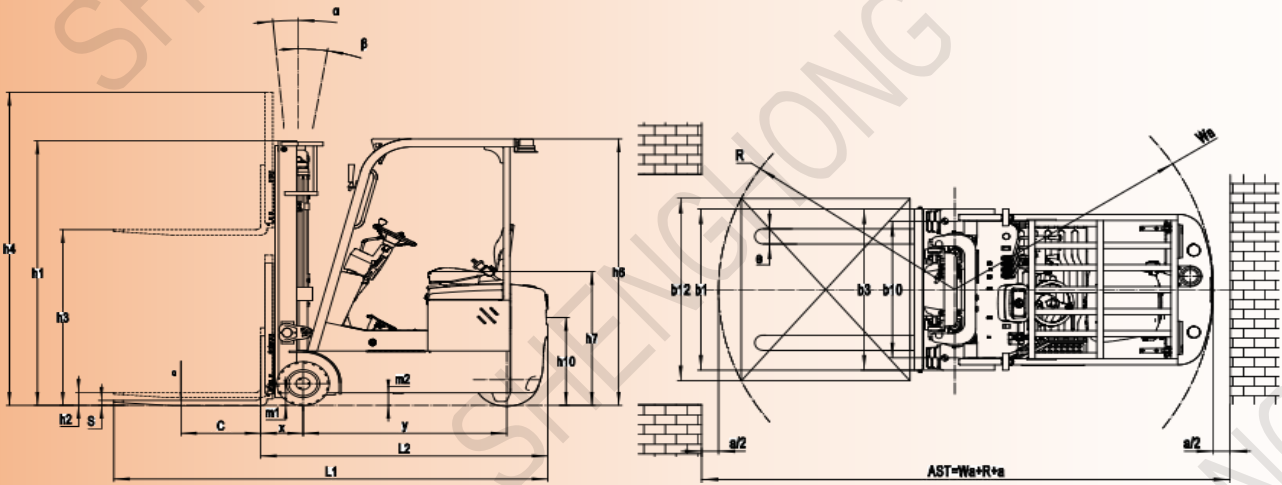
Company profile

- SHLE was founded in 2008. An ISO 9001 certificated company, it is a comprehensive R & D and manufacturing factory dealing with some domestic military equipment.
- Invented and manufactured China's first 48-ton diesel forklift truck (the largest in the country) and 20-ton side forklift truck (the largest in the country)
- Our factory can provide OEM service, Customizable colors, Customizable Logo, and 95% delivery time rate.

Product specification

1.2	Model			CPD08	CPD12	CPD15
1.3	Drive			Electric	Electric	Electric
1.4	Operator type			Seated	Seated	Seated
1.5	Load capacity		kg	800	1200	1500
1.6	Load center distance		mm	500	500	500
1.8	Load distance center of drive axle to fork		mm	204	310	265
1.9	Wheelbase	y	mm	1015	1200	1275
2.1	Service weight		kg	1520	1950	2200
2.2	Axle loading, laden front/rear		kg	1920/400	2845/315	3290/410
2.3	Axle loading, unladen front/rear		kg	620/900	885/1075	890/1310
3.1	Tyre type			Solid Rubber	Solid Rubber	Solid Rubber
3.2	Tyre size, front			3.50-5	16X6-8	330x145
3.3	Tyre size, rear			230×90	3.5-5	330x145
3.5	Wheels, number front/rear (x drive wheels)		mm	1x/2	2X/2	2/1x
3.6	Tread width, front	b10	mm	779	838	905
3.7	Tread width, rear	b11	mm	—	208	—
4.1	Travel of mast/fork carriage forward/backward			3-3	6-6	45/21
4.2	Retracted mast height	h1	mm	2061	1990	1980
4.3	Free lift	h2	mm	—	120	100
4.4	Uit height	h3	mm	3000	3000	3000
4.5	Height, mast extended	h4	mm	3908	3919	4054
4.7	Height of overhead guard (cabin)	h6	mm	1988	1960	1995
4.8	Seat height/standing height	h7	mm	878	925	985
4.12	Tow coupling height	h10	mm	—	483	660
4.19	Overall length	l1	mm	2402	2434	2680
4.2	Length to face of forks	l2 mm		1482	1684	1760
4.21	Overall width	b1/62	mm	894	1020	1060
4.22	Fork dimensions	s/ei	mm	35×100×920	35X100X750	40x100x920
4.23	A.B Fork carriage class/type A. B			2A	2A	2A
4.24	Fork carriage width	b3	mm	840	960	1040
4.31	Ground clearance, laden, below mast	m1	mm	60	93	90
4.32	Ground clearance, center of wheelbase	m2	mm	98	89	78
4.34.1	Aisle width for pallets 1000x 1200 crossways	Ast	mm	2824	2804	3095
4.34.2	Aisle width for pallets 800x 1200 crossways	Ast	mm	2938	3026	3213
4.35	Tuning radius	Wa	mm	1278	1422	1495
5.1	Travel speed, laden/unladen		km/h	6-8	11-13	45/78
5.2	Lifting speed, laden/unladen		m/s	0.13/0.2	0.28/0.35	0.25/0.3
5.3	Lowering speed, laden/unladen		m/s	0.16/0.15	0.35/0.35	0.44/0.425
5.5	Drawbar pull, laden/unladen		N	—	13/15	—
5.6	Max. drawbar pull, laden/unladen		N	—	—	—
5.8	Max. gradeability, laden/unladen		%	—	—	10/12
5.10	Service brake					Hydraulic
5.11	Parking brake			Hydraulic	Hydraulic	Hydraulic

		Mechanical	Mechanical	Mechanical
6.1	Drive motor rating S2 60 min	kW	1.6	2.0X2
6.2	Lit matar rating at S3 15%	kW	2.2	7
6.4	Battery voitagenominal capacity	V/Ah	24V/250Ah	80V/50Ah
6.5	Battery weight	kg	140	65
8.1	Type of drive control		AC	AC
10.5	Steering design		electric	Hydraulic
10.7	Sound pressure level at the driver's ear	dB(A)	74	68
				70

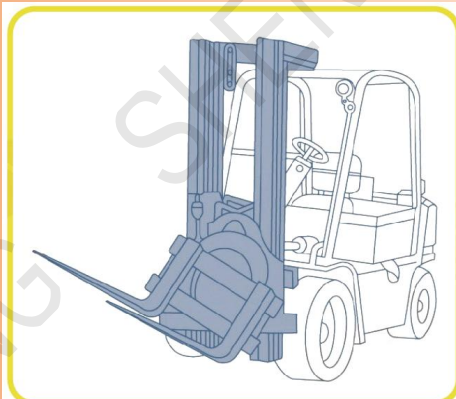
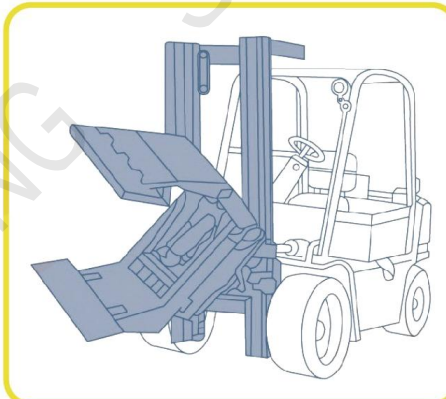
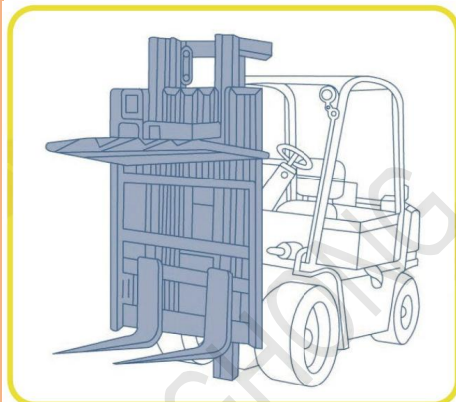
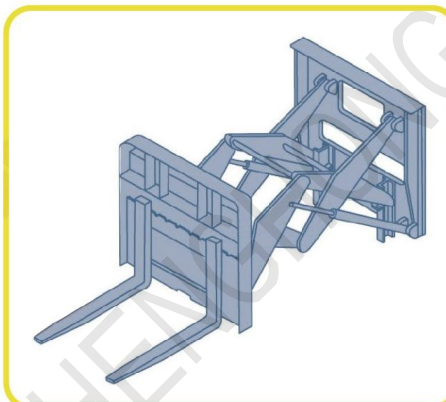
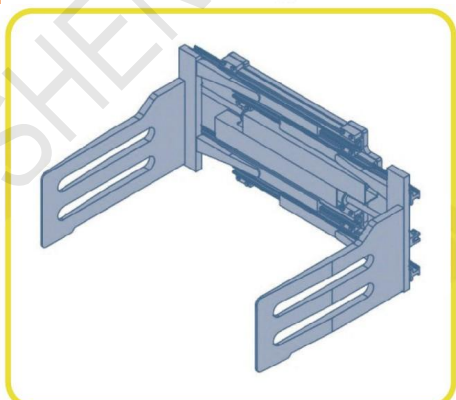
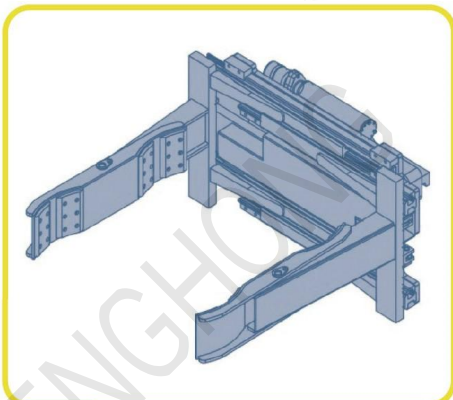


No.	Optional items	EFS151
-----	----------------	--------

1.1	Fork dimension	●100*40*9200100*40*1070o100*40*1100 0100*40*1150o100*40*1220o100*40*1370o100*40*1520
1.4	Fork carriage width	●1040mmYes and can be customized
1.5	Fork carriage height	●1025mmYes and can be customized
2.5	Front wheel material	●solid
2.6	Rear wheel material	●solid
2.7	Battery capacity	●48V180AH (AGM)048V150AH (Li-ion)
2.8	Charger	●48V30A (External)048V30A-Li Internalo48V50A-Li Internal
2.10	Seat type	●RegularoPremium
2.11	Attachments	●NooBuilt-in sideshiftersoExternal shifteroAdjustable fork
2.13	Traction pin	●Yes
3.5	Front lamp	●LED
3.6	Rear lamp	●NooLED
3.7	Warning lamp	●Yes
3.8	Steering lamp	●Yes
3.9	Blue lamp	●Noo2 fronto1 rearo2 front +1 rear
3.10	Area warning lamp	●Noo1 left+1 right(Red)
3.11	Rearview mirror	●One Rearview mirroroTwo Rearview mirror
3.12	Buzzer	●Yes
3.15	Fire extinguisher	●NooYes and not customized
3.17	OPS system	●NooYes and not customized
3.23	Telematics	●NooYes and not customized
Note: ●Standard o Optional -Inconformity		

- It features a compact size and offers great maneuverability to cope with handling tasks in narrow spaces. With this 2200kg light-weight truck, operators can drive smoothly for cargo lift and mezzanine operation.
- It comes with small turning radius of 1495mm, which makes it a flexible tool for the electronics, textile and lighting industries.
- Thanks to ergonomic improvements, the forklift provides a large legroom for comfortable operation and improved work efficiency.
- The forklift adopts 48V/180Ah maintenance free AGM battery(or lithium battery), which effectively reduces operation costs.

Attachment

Sideshift**Fork positioner****Hinged fork****Rotator****Hinged bucket****Rotating roll clamp****Load stabilizer****Push pull****Load extender****Bale clamp****Drum clamp****Carton clamp**