


YANTAI SHENGHONG TRADING CO., LTD

Add: 23 South Beijing Road, Yantai Development Zone, Shandong Province, China

Email:shle@ytshtesting.com

WhatsApp/Wechat:+86 13954571733

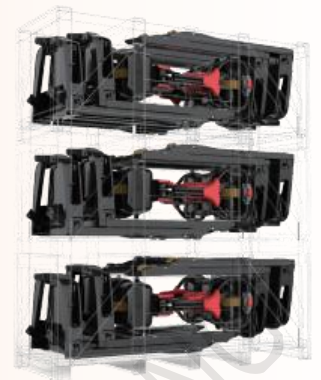

Company profile



- SHLE was founded in 2008. An ISO 9001 certificated company, it is a comprehensive R & D and manufacturing factory dealing with some domestic military equipment.
- Invented and manufactured China's first 48-ton diesel forklift truck (the largest in the country) and 20-ton side forklift truck (the largest in the country)
- Our factory can provide OEM service, Customizable colors, Customizable Logo, and 95% delivery time rate.

Product specification

1.2	Model			SPS15	SPT20	SPY30
1.3	Drive			Electric	Electric	Electric
1.4	Operator tvne			Pedestian	Pedestian	Pedestrian
1.5	Load capacity	Q	kg	1500	2000	3000
1.6	Load center distance	C	mm	600	600	600
1.8	Load distance, centre of dirive axle to fork	X	mm	950	905	960
1.9	Wheelbase	Y	mm	1180	1441	1364
2.1	Senice weight		kg	120	625	300
2.2	Axle loading. laden front/rear		kg	480/1140	910/1715	1012/2288
2.3	Axle loading. uniaden front/rear		kg	90/30	420/205	220/80
3.1	Tyre type			Polyurethane	Polyurethane	Polyurethane
3.2	Tyre size, front			210mmx70mm	Φ 230x75	Φ 300x90
3.3	Tyre size, rear			80mmx60mm	Φ 85x70	Φ 80x61
3.4	Additional wheels (castor wheels)		mm	74mmx30mm	Φ 85x48	Φ 74x30
3.5	Wheels. number front/rear(x=drive wheels)		mm	1x, -14	1×+2/4	1x-/4
3.6.1	Tread width, front	b10	mm		498	---
3.7.1	Tread width, rear	b11	mm	410(535)	366	390(515)
4.4	Lit height	h3		105	120	125
4.9	Height of tiller handle in drive position min./mex	h14	mm	750/1190	715/1200	700/1170
4.15	Lowered height	H13	mm	88	95	85
4.19	Overall length	L1	mm	1550	1850	1754
4.20	Length to face of forks	L2	mm	400	694	606
4.21	Overall width	b1/6 2	mm	590(695)	710	620(685)
4.22	Fork dimensions	sel	mm	55X150X1150	60/190/1150	55/170/1150
4.25	Fork soreed	b5	mm	560(685)	560	560(685)
4.32	Ground clearance, center of wheelbase	m2	mm	25	30	30
4.34.1	Aisle width for pallets 1000x 1200 crossways	ast		2160	1913	2325
4.34.2	Aisle width for pallets 800x 1200 lengthways	ast	mm	2025	2113	2236
4.35	Tuning radius	wa	mm	1360	1615	1570
5.1	Travel speed, laden/uniaden	Km/h		4/4.5	5/5.5	3.5/4.0
5.2	Litting speed, laden/unladen	M/s		0.017/0.020	0.024/0.025	0.013/0.018
5.3	Lowering speed. laden/unladen	M/s		0.058/0.046	0.071/0.121	0.023/0.016
5.8	Max. gradeability, laden/unladen	%		6/16	8/16	8/30
5.10	Senice brake			Electromagnetic	Electromagnetic	Eectromagnetic
6.1	Drive motor rating S2 60 min	kw		0.75	1.27	1.2
6.2	Lit motor rating at S3 15%	kw		0.5	0.84	0.8
6.4	Ratter oltacenominal capacity	V/AH		24/20	24/150	48/65
6.5	Battery weight	kg		5	140	60
6.6	Energy consumption according to DIN EN 16796	Km/h		0.18		---
6.7	Tumover cutout according to VDI2198	T/h				---

- 8.1 Type of drive control
 10.5 Steering design
 10.7 Sound pressure level at the driver's ear

60			
DC	AC	AC	
Mechanical	Mechanical	Mechanica	
dB(A) 74	74	74	

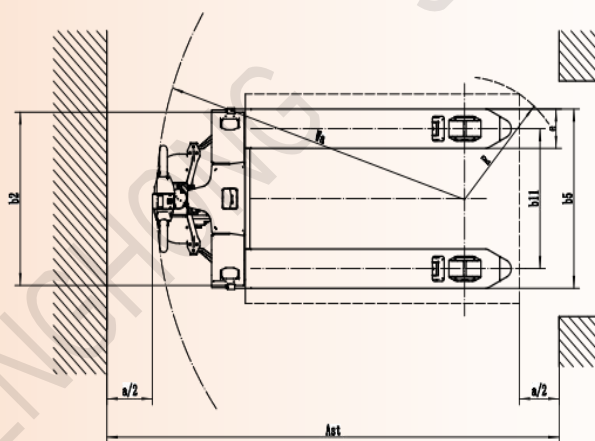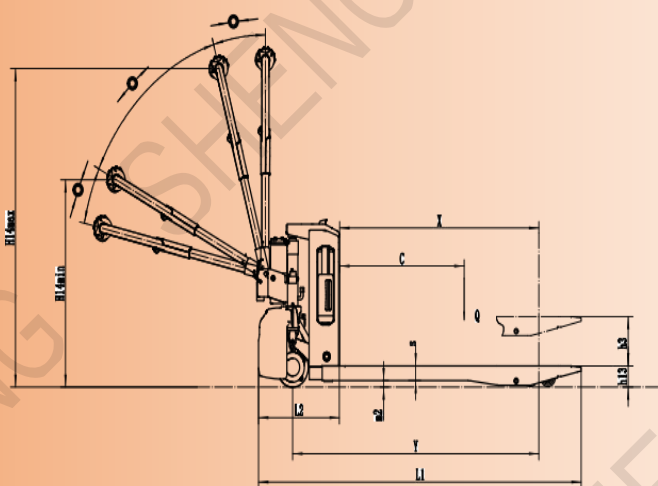

No.	Optional items	
1.1	Fork dimension	●1150*560○900*560○1000*560○1220*560○1350*560○1500*560 ○900*685○1000*685○1150*685○1220*685○1350*685○1500*685
1.3	Fork lowered height	●80
1.6	Drive cover off the ground	●55mm
2.1	Load wheel type	●Double○Single
2.2	Load wheel material	●PU
2.3	Drive wheel material	●PU
2.7	Battery capacity	●20AH×1○20AH×2○20AH×3○20AH×4
2.8	Charger	●24V-5A external○24V-10A external○24V-4A external DC-DC
2.9	Battery indicator	●Without time
2.16	handle head type	●Hands small handle head○ET Hands big handle head
3.3	Castor wheels	●No○Yes and not customized
3.12	Buzzer	●Yes and not customized
3.16	Turtle speed	●Yes and not customized
4.8	Drive assembly	●Yes and not customized
5.2	Charger base	●No○Yes and not customized