

YANTAI SHENGHONG TRADING CO., LTD

Add: 23 South Beijing Road, Yantai Development Zone, Shandong Province, China

Email:shle@ytshtesting.com

WhatsApp/Wechat:+86 13954571733



Company profile

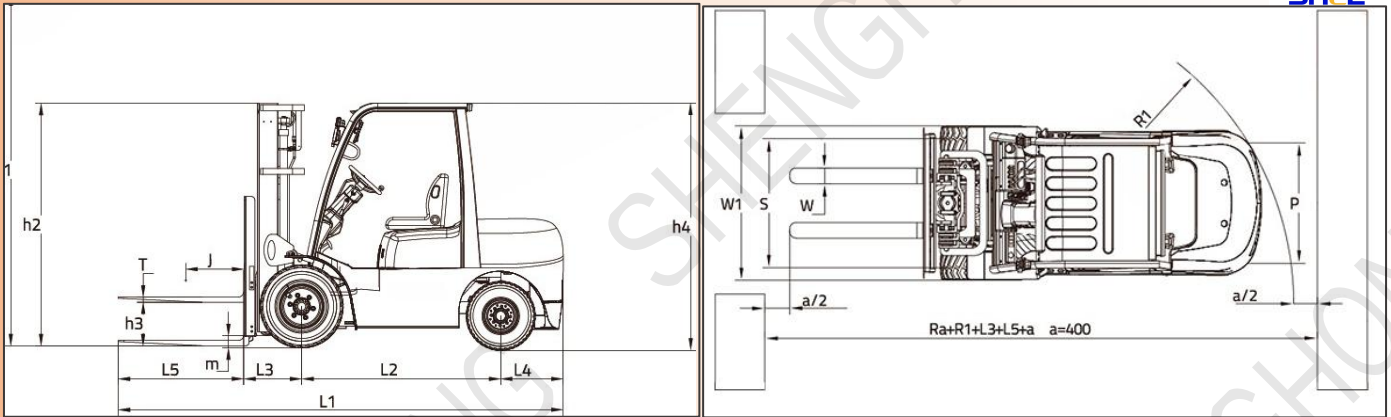
- SHLE was founded in 2008. An ISO 9001 certificated company, it is a comprehensive R & D and manufacturing factory dealing with some domestic military equipment.
- Invented and manufactured China's first 48-ton diesel forklift truck (the largest in the country) and 20-ton side forklift truck (the largest in the country)
- Our factory can provide OEM service, Customizable colors, Customizable Logo, and 95% delivery time rate.

Product specification

WhatsApp/Wechat:+86 13954571733

Forklift Truck Parameter List(1.5 Ton to 3.5 Ton)

Model			CPQD15	CPQD20	CPQD25	CPQD30	CPQD35	
PARAMETERS	POWER		GASOLINE					
	CAPACITY	kg	1500	2000	2500	3000	3500	
	LOAD CENTRE	J(mm)	500	500	500	500	500	
	LIFT HEIGHT	H1(mm)	3000	3000	3000	3000	3000	
	FREE LIFTING HEIGHT	H3(mm)	135	135	135	145	160	
	FORK SIZE	L*W*H L5*W*H(m m)	920*100* 35	1070*122* 40	1070*122* 40	1070*122* 40	1070*122* 40	
	MIN. TURNING RADIUS	R1(mm)	2190	2190	2240	2400	2470	
	MIN. GROUND CLEARANCE	Ra(mm)	110	120	120	135	135	
	OVERHEAD GUARD HEIGHT	H4(MM)	2070	2140	2140	2160	2160	
	TOTAL LENTH	WITH FORK	mm	3610	3600	3650	3770	3870
		WITHOUT FORK	L1(mm)	2540	2530	2580	2700	2800
	TOTAL WIDTH	W1(mm)	1160	1160	1160	1225	1225	
	MAST HEIGHT	H2(mm)	2100	2100	2100	2100	2100	
	TIRES DISTANCE	L2(mm)	1410	1600	1600	1700	1700	
	TIRES DISTANCE	S(mm)	890/920	970/970	970/970	1000*970	1000/970	
	SERVICE WEIGHT	NO LOAD	Kg	3530	3530	3880	4350	4605
	ENGINE	TYPE		GQ419GP	NISSAN K21		NISSAN K25	
		RATED POWER	kw/r.p.m	46/2800	31.2/2250		35.6/2100	
		RATED TORQU	Nm/r.p.m	168/1800	143.7/1600		176.5/1600	
		BORE × STROKE	mm	91×86	89×93		89×100	
		CYLINDER S		4	4		4	
		CC	L	2.237	2.065		2.488	
	FUEL CAPACITY	L	60	60	60	70	70	

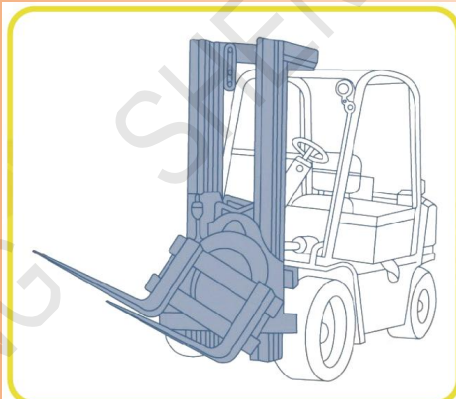
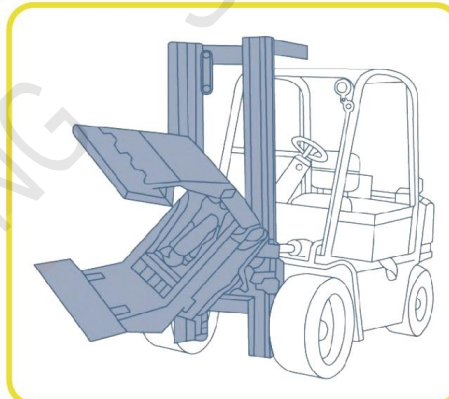
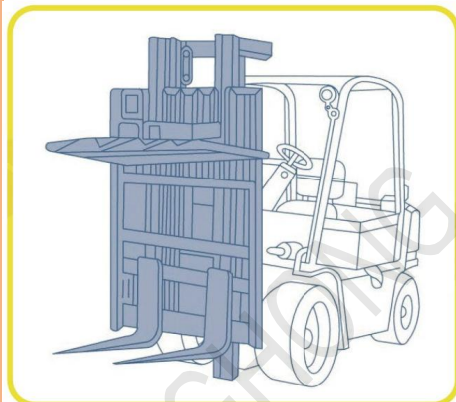
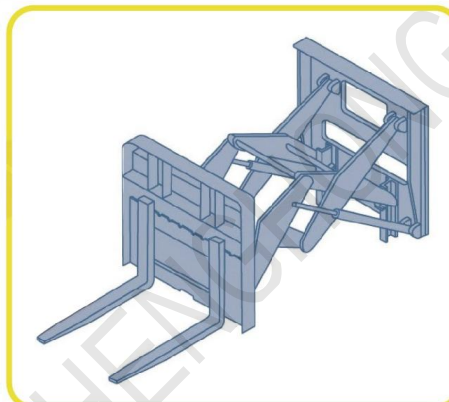
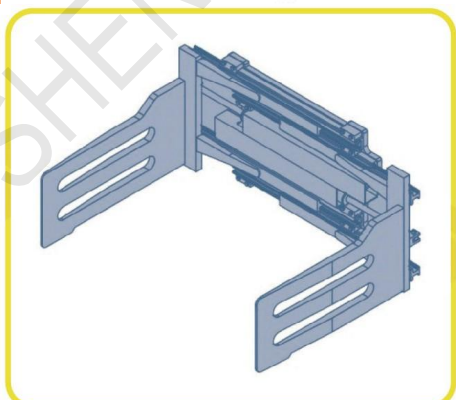
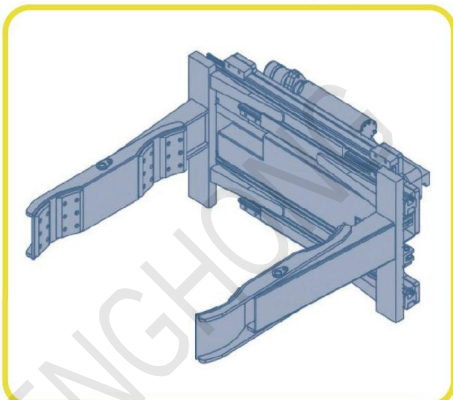


STANDARD EQUIPMENT

1.Wide view mast	11.Hydraulic filter	22.Radiator reservoir
2.Class II(III) carriage	12.Oil filter	23.Tilt adjustable steering post
3.Load backrest	13.Halogen head lights	24.Turn signal lights
4.Standard fork	14.Rear view mirrors	25.Lamp guard
5.Pneumatic tires	15.Rear combination lights	26.Full hydrostatic power steering
6.Overhead guard	16.Back-up lamp	27.Hout Meter
7.Standard seat	17.Electric horn	28.Water temperature meter
8.Drawbar pin	18.Nautral safety switch(Tor-Con)	29.Fuel meter
9.Air cleaner	19.Deluxe rubber floor mat	30.Ignition key engine stop (C)
10.2-spool control valve with pressure relief valve	20.Head guard canvas	31.Head grip
21.Overhead air intake		32.Operator tool kit

- 1.With the newest appearance design method, the whole forklift has smooth profile lines, presents and meets the newest appearance design fashion.
- 2.Wide view mast design,ensure the driver has an excellent view, which makes loading and unloading operations more secure and efficient.
- 3.The new efficiency LED lighting system and new type reflector reduce energy consumption, improve illumination performance and prolong working life.
- 4.Reliable LCD digital instrument, friendly human-machine interface, easy to driver
- 5.Ensure control of vehicle status;
- 6.The new steering wheel adjustment mechanism improves the operation comfort and adjustment reliability;
- 7. High top type large diameter air intake system design, can make the engine away from dust, effectively play the engine performance, improve life;

Attachment

Sideshift**Fork positioner****Hinged fork****Rotator****Hinged bucket****Rotating roll clamp****Load stabilizer****Push pull****Load extender****Bale clamp****Drum clamp****Carton clamp**