### YANTAI SHENGHONG TRADING CO., LTD

Add: 23 South Beijing Road, Yantai Development Zone, Shandong Province, China
Email:shle@ytshtrading.com
WhatsApp/Wechat:+86 13954571733




# Company profile

- SHLE was founded in 2008. An ISO 9001 certificated company, it is a comprehensive R
   & D and manufacturing factory dealing with some domestic military equipment.
- Invented and manufactured China's first 48-ton diesel forklift truck (the largest in the country) and 20-ton side forklift truck (the largest in the country)
- Our factory can provide OEM service, Customizable colors, Customizable Logo, and 95% delivery time rate.

# PARAMETERS

# Product specification

| PAKAMELEKS | ١                        | Model           |                   | CPC(D)40          | CPC(D)45      | CPC(D)50          |
|------------|--------------------------|-----------------|-------------------|-------------------|---------------|-------------------|
|            | POWER                    |                 |                   |                   | DIESEL        |                   |
|            | CAPACITY                 |                 | kg                | 4000              | 4500          | 5000              |
|            | LOAD CENTRE              | .(^             | J(mm)             | 500               | 500           | 500               |
|            | LIFT HEIGHT              |                 | H1(mm)            | 3000              | 3000          | 3000              |
|            | FREE LIFTING<br>HEIGHT   |                 | H3(mm)            | 160               | 160           | 210               |
|            | FORK SIZE                | L*W*H           | L*W*H(mm)         | 1070×150×50       | 1070×150×50   | 1070×150×55       |
|            | MIN. TURNING<br>RADIUS   |                 | R1(mm)            | 2710              | 2820          | 2900              |
|            | MIN. GROUND<br>CLEARANCE |                 | Ra(mm)            | 140               | 150           | 175               |
|            | OVERHEAD GUARD<br>HEIGHT |                 | H4(MM)            | 2180              | 2230          | 2240              |
|            | TOTAL LENTH              | WITH<br>FORK    | mm                | 4000              | 4120          | 4190              |
|            |                          | WITHOUT<br>FORK | L1(mm)            | 2920              | /3050         | /3120             |
|            | TOTAL WIDTH              |                 | W1(mm)            | 1290              | 1400          | 1480              |
|            | MAST HEIGHT              |                 | H2(mm)            | 2270              | 2270          | 2270              |
|            | TIRES DISTANCE           |                 | L2(mm)            | 1900              | 1900          | 2000              |
|            | SERVICE WEIGHT           | NO LOAD         | Kg                | 4950              | 5860          | 6700              |
|            | ENGINE OPTION            |                 |                   |                   |               |                   |
|            | ENGINE MODEL             |                 | XICHAI<br>4Dx32   | Cummins<br>QSF2.8 | ISUZU<br>6BG1 | Mitsubishi<br>S6S |
|            | RATED POWER              | kw/r.p.m        | 60/2200           | 55/2500           | 82.4/2200     | 52/2300           |
|            | RATED TORQU              | Nm/r.p.m        | 320/1400-<br>1700 | 300/1600          | 417/1500      | 248/1700          |
|            | BORE × STROKE            | mm              | 102x118           | 94x100            | 105x125       | 94x120            |
|            | CYLINDERS                |                 | 4                 | 4                 | 6             | 6                 |
|            | CC                       | L               | 3.857             | 2.8               | 6.494         | 4.966             |

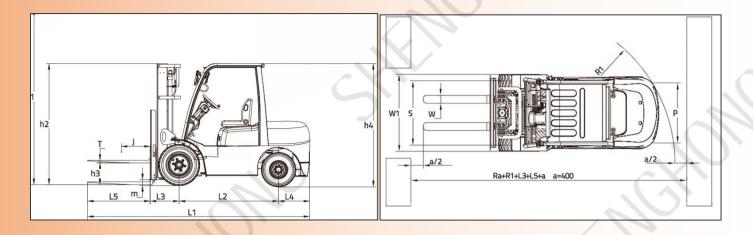

#### STANDARD EQUIPMENT

1. Wide view mast 11. Hydraulic filter 22. Radiator reservoir

2.Class II(III) carriage 12.Oil filter 23.Tilt adjustable steering post

3.Load backrest 13.Halogen head lights 24.Turn signal lights

4.Standard fork 14.Rear view mirrors 25.Lamp guard

5.Pneumatic tires 15.Rear combination lights 26.Full hydrostatic power steering

6.Overhead guard 16.Back-up lamp 27.Hout Meter

7.Standard seat 17.Electric horn 28.Water temperature meter

8.Drawbar pin 18.Nautral safety switch(Tor-Con) 29.Fuel meter

9.Air cleaner 19.Deluxe rubber floor mat 30.Ignition key engine stop (C)

10.2-spool control valve 20.Head guard canvas 31.Head grip

with pressure relief valve 21.0verhead air intake 32.0perator tool kit

- ➤ 1. With the newest appearance design method, the whole forklift has smooth profile lines, presents and meets the newest appearance design fashion.
- ➤ 2. Wide view mast design, ensure the driver has an excellent view, which makes loading and unloading operations more secure and efficient.
- > 3. The new efficiency LED lighting system and new type reflector reduce energy consumption, improve illumination performance and prolong working life.
- ➤ 4.Reliable LCD digital instrument, friendly human-machine interface, easy to driver
- > 5.Ensure control of vehicle status;
- ➤ 6.The new steering wheel adjustment mechanism improves the operation comfort and adjustment reliability;
- 7. High top type large diameter air intake system design, can make the engine away from dust, effectively play the engine performance, improve life;

## Attachment

Sideshift



Hinged fork





Rotator

Hinged bucket

Rotating roll clamp









Load stabilizer

Push pull

Load extender







Bale clamp

Drum clamp

Carton clamp

